

CLASSIC HERITAGE STRAIGHT



With a raised seat height of 18", the Classic Heritage Straight bench is the perfect complement to our Classic Heritage bench when a backless version might be better suited for a particular site. The Classic Heritage Straight allows users to sit comfortably on either side of the bench providing increased functionality and versatility, boasting extra wide-grip arms providing easy ingress and egress from both seating and standing positions. Customization options include side-facing nameplates and logos/images, and a multitude of colours and arm configurations.

Standard Colour Options



Proud

Classic Displays

Right for you since 1977

CLASSIC HERITAGE STRAIGHT

Product Data Sheet





MATERIALS

- 100% Recycled Plastic Slats
- Cast Aluminum Ends
- Electrostatically Zinc Plated Steel Harness
- Stainless Steel Hardware

FINISHES

- Cast Aluminum Ends And Zinc Treated Steel Components
- Slats Available In Grey, Walnut, Sand, Green, Redwood, Olive And Charcoal
- Glossy Black Powdercoat Finish Resistant To Impact, Moisture, Chipping, Corrosion, And Fading

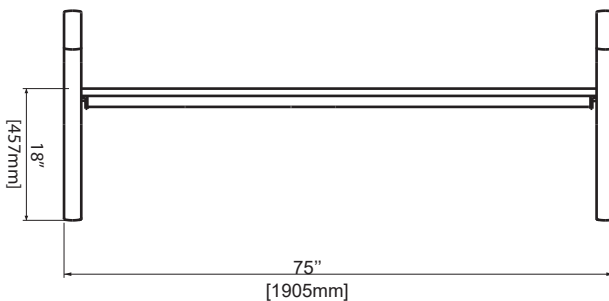


TO SPECIFY

- Slat Colour
- Frame / Ends Colour
- Optional Centre Arm
- Optional Side Name Plates
- Optional Side Lexan Logo

Length	75"	1905mm
Depth	29"	737mm
Height	26"	660mm
Seat Height	18"	457mm
Weight	152 lbs	69 kg

Optional Centre Arm Configuration

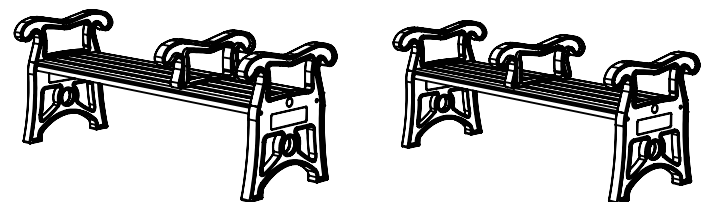

Classic Displays
Right for you since 1977

CLASSIC HERITAGE STRAIGHT

Bench Options

Custom Bronze or Aluminum Plaque



Custom Standard Plaque




Logo Insert



Side Nameplates/Lexan Logo



Standard Colour Options

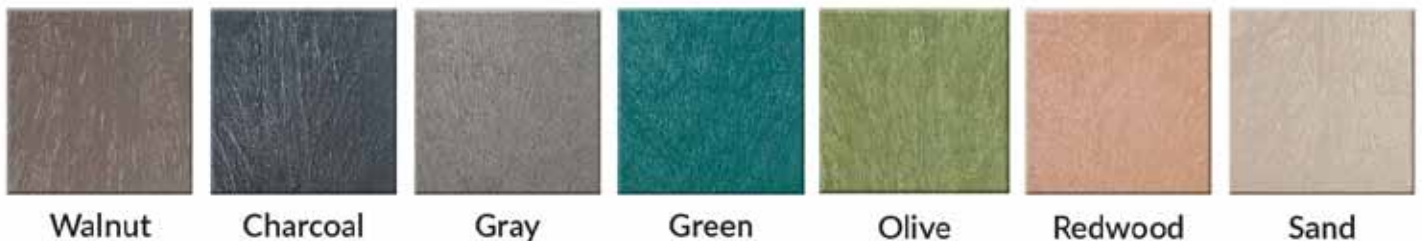

• Min. Quantities May Apply

• Additional Customization Available

CLASSIC HERITAGE STRAIGHT

Installation

- For Benches with pre-drilled Legs

Tools and Hardware Required:

- Hammer Drill
- Masonry Bit
- Expanding concrete/wedge anchor (stainless steel recommended) with locking nut

Instructions:

- Drill ½" deeper than anchor will penetrate
 - Deeper anchor will offer better hold
- Drill hole in concrete equal to diameter of anchor
 - Depth of Wedge Anchor = Thickness of material fastened + Minimum embedment
 - Leave space for nut and washer
- Insert wedge anchor into concrete
 - Turn nut clockwise while pulling the anchor up
 - Wedge clip between anchor & concrete.

Notes:

- Do not install anchor within 10 anchor diameters of other anchor, or within 5 anchor diameters of unsupported edge.
- Install on even concrete surface



Classic Displays

Proud Right for you since 1977

CLASSIC HERITAGE STRAIGHT

Warranty

Classic Displays Site Furniture Warranty Statement

Classic Displays warrants to the original owner of a Classic Displays product for five (5) years from the date of substantial completion, that the product they receive will be free from defective workmanship and materials when subjected to proper and normal uses.

Limitations of Liability

Classic Displays warrants that should defects occur with a Classic Displays product, the company herein recognizes that it will produce a replacement product and ship it to the original owner at no charge.

Classic Displays shall not be liable for any consequential damages that the product may receive through incorrect usage, incorrect assembly or storage, vandalism, accidents, UV fading, visible rust, damage caused by animals, adverse environment conditions, or used in conjunction with materials harmful to the product (i.e road salt). This warranty does not cover wear and tear, and maintenance work is not considered a warranty issue.

In the event that defective materials are received, please advise our office immediately to expedite replacement materials.

Acceptance of Merchandise: Claims of products that are lost or damaged in transit are the responsibility of the customer in reporting the claim. When accepting shipment, missing cartons or visible damage must be noted on the carrier's bill of lading/receipt of delivery, and reported to our office immediately. Claims must be filed with the delivering carrier as soon as possible or may result in refusal of claim by the carrier.

Maintenance

Recycled Plastic Lumber:

- Using a plastic bristled brush, clean with mild soap, or water & vinegar solution.
- To remove grease, use a household grease remover.
- To remove scratches, lightly sand or brush, or use stainless steel brush.
- Restore surface by scrubbing with water & SOS pad.
- Rinse with water
- Power wash or pressure jet clean to remove graffiti & UV degradation (max 1200psi & maintain distance of 5 inches or greater)
- Use electric heat-gun or acetylene torch with metal putty knife to repair minor scratches.
- Graffiti remover with "Wipeout" by "Off the Walls"

Aluminum & Steel:

- Wash with mild soap & soft cloth. Touch up with paint pen

*Product design and specifications are the intellectual property of Classic Displays and may not be recreated without Classic Displays written consent.

