

Ergo Bike Rack



The Ergo bike rack is a modern styled surface-mounted 2 capacity bike rack. As part of the Ergo series of site furnishings, the Ergo bike rack is designed equally for aesthetics, function, and safety. With two points of contact with the bike frame while allowing a single U-Lock to capture both the frame and one wheel, cyclists will appreciate its ease of use, while welcoming the added security of the robust 2.38" diameter pipe which strongly discourages would-be thieves.

With its modern yet simplistic appearance, the Ergo bike rack looks equally great as a single free-standing unit, or as part of a series of bike racks spaced adequately apart. The Ergo bike rack meets the standards set out by the APBP for bike rack design.



Classic Displays

Right for you since 1977

Ergo Bike Rack

Product Data Sheet




Materials:

-Galvanized/Zinc-Plated Steel or A316 Marine Grade Stainless Steel

Features:

-Indoor/Outdoor Application
 -2.38" Schedule 40 pipe
 -3/8" Thick Steel Pre-Drilled Baseplate
 -Optional Powder Coat Paint Colours

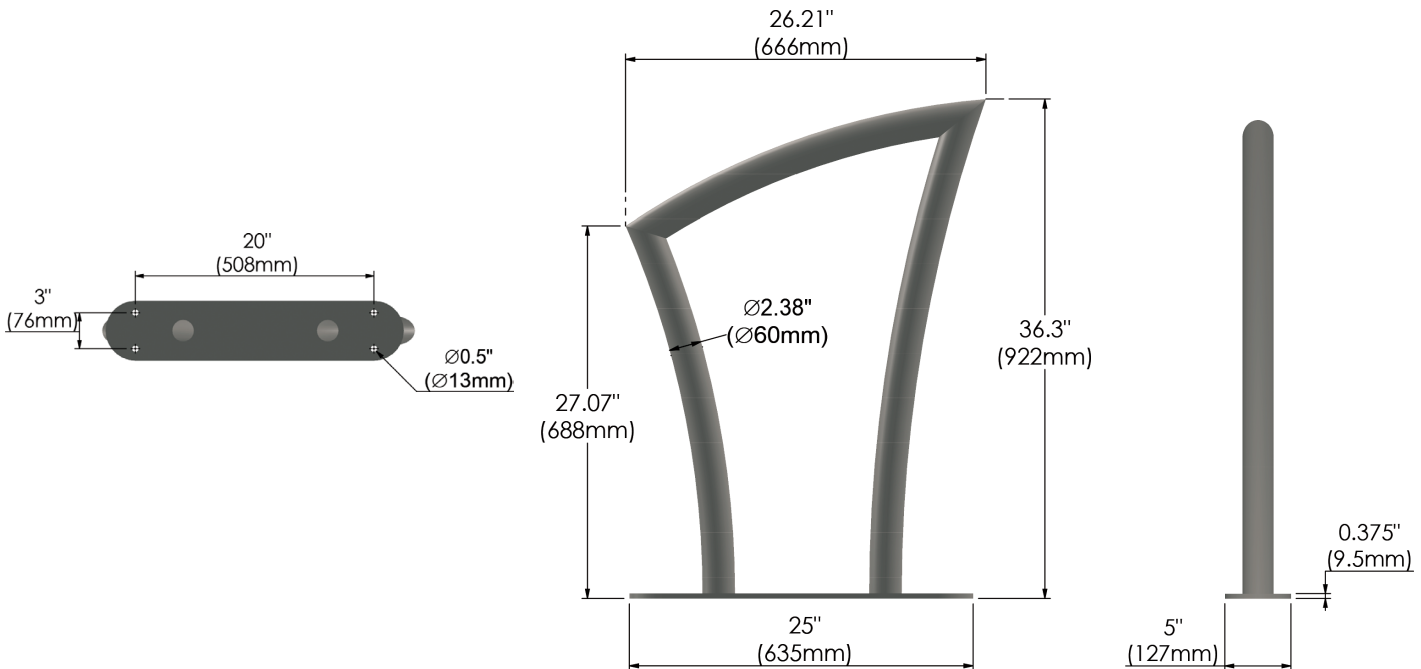

Length	26.2"	665mm
Width	5"	127mm
Height	36.3"	922mm
Weight	38 lbs	17.2 kg

To Specify:

-Galvanized, Powder Coat, or Stainless Steel Finish
 -Optional Paint Colours



Classic Displays
 Proud Right for you since 1977

Ergo Bike Rack

Installation

Tools and Hardware Required:

- Hammer Drill/Core Drill
- Masonry Bit
- Expanding concrete/wedge anchor (stainless steel recommended) with locking nut (For Surface Mount Installation)
- Grout and Level (For In-Ground Installation)

Surface Mount Installation:

- Drill 1/2" deeper than anchor will penetrate
- Deeper anchor will offer better hold
- Drill hole in concrete equal to diameter of anchor
- Depth of Wedge Anchor = Thickness of material fastened + Minimum embedment
- Leave space for nut and washer
- Insert wedge anchor into concrete
- Turn nut clockwise while pulling the anchor up
- Wedge clip between anchor & concrete

Notes:

- Do not install anchor within 10 anchor diameters of other anchor, or within 5 anchor diameters of unsupported edge
- Base is pre-drilled for easy surface mounting (recommended)
- Install on even concrete surface

In-Ground Bike Rack Installation:

- Drill 4" diameter holes 10" deep into surface
- Insert Bike Rack into holes, and ensure rack is level
- Once bike rack is level, fill hole with epoxy grout
- Hold rack in level position until the grout has set



Classic Displays

Proud Right for you since 1977

Ergo Bike Rack

Warranty

Classic Displays Site Furniture Warranty Statement

Classic Displays warrants to the original owner of a Classic Displays product for five years from the date of substantial completion, that the product they receive will be free from defective workmanship and materials when subjected to proper and normal uses.

Limitations of Liability

Classic Displays warrants that should defects occur with a Classic Displays product, the company herein recognizes that it will produce a replacement product and ship it to the original owner at no charge. Classic Displays shall not be liable for any consequential damages that the product may receive through incorrect usage, adverse environment conditions, or used in conjunction with materials harmful to the product.

In the event that defective materials are received, please advise us our office immediately to expedite replacement materials.

* **Acceptance of Merchandise:** Claims of products that are lost or damaged in transit are the responsibility of the customer in reporting the claim. When accepting shipment, missing cartons or visible damage must be noted on the carrier's bill of lading/receipt of delivery, and reported to our office. Claims must be filed with the delivering carrier as soon as possible or may result in refusal of claim by the carrier.

Maintenance

Wash with Soap and Water

- Mix 1/4 cup dish soap in a gallon of hot (not scalding) water.
- Scrub the metal surface with firm, circular strokes using a soft-bristled brush.
- Rinse this off thoroughly with hot water and then wipe it dry using a lint-free cloth.

Clean Off Hard Water

- Create a solution of equal parts white distilled vinegar and water.
- Rub the solution into the metal with a soft cloth or spray with a spray bottle.
- Dry with a cloth.

Neutralize Alkaline Deposits (Galvanized Steel)

- Mix one part baby powder with two parts milk.
- Use a toothbrush to apply this solution to the metal surface.
- Rinse off and dry thoroughly.



Classic Displays

Proud Right for you since 1977