

ACCESSABILITY TABLE



With an oversized 40" table top, featuring a 28" Stainless Steel game table, the AccessAbility Table combines the function of a wheelchair accessible picnic table with a traditional fixed seating table. The 40" bench seats on accommodate 2 adults on each side, with open seating providing proper knee and toe clearance for 2 wheelchairs on the remaining 2 sides. Featuring a galvanized steel frame, the AccessAbility Table is available in 7 colours of recycled plastic lumber slating.

Standard Colour Options



Walnut



Charcoal



Gray



Green



Olive



Redwood



Sand



Proud

Classic Displays

Right for you since 1977

ACCESSABILITY TABLE

Product Data Sheet




MATERIALS

- 100% Recycled Plastic Lumber Slats
- Stainless Steel Game Table Top
- Galvanized Steel Frame
- Stainless Steel Hardware

FINISHES

- Frame Available in Galvanized Finish Only
- Slats Available In Grey, Walnut, Sand, Green, Redwood, Olive And Charcoal

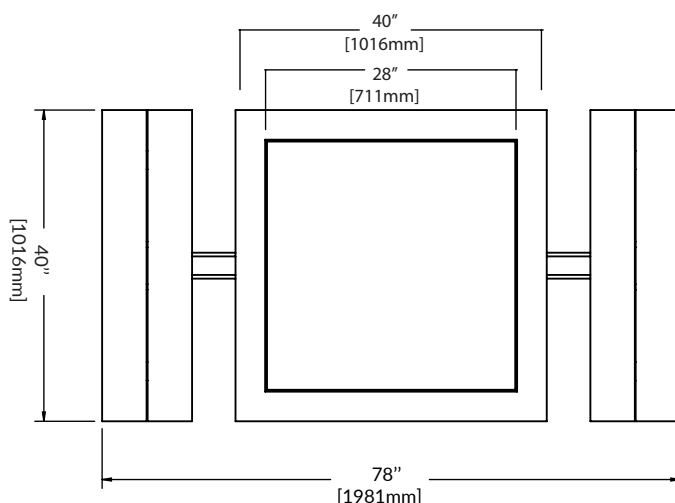


TO SPECIFY

- Slat Colour
- Optional Seat Support

Length	78"	1981mm
Width	40"	1016mm
Height	34"	864mm
Seat Height	17"	432mm
Table Top	40"	1016mm
Game Table	28"	711mm
Weight	180 lbs	82 kg

With Optional Seat Support

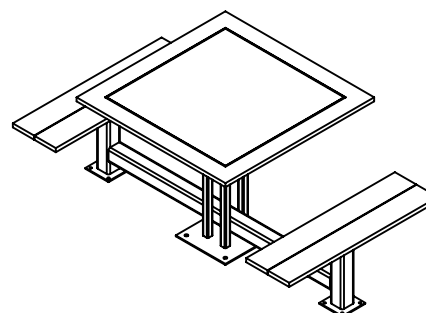

Proud

Classic Displays

Right for you since 1977

info@classicdisplays.com · 1-800-461-6635 · www.classicdisplays.com · 5959 Ambler Drive · Mississauga ON · L4W 2K2

ACCESSABILITY TABLE

Installation

- For Tables with pre-drilled Legs

Tools and Hardware Required:

- Hammer Drill
- Masonry Bit
- Expanding concrete/wedge anchor (stainless steel recommended) with locking nut

Instructions:

- Drill ½" deeper than anchor will penetrate
 - Deeper anchor will offer better hold
- Drill hole in concrete equal to diameter of anchor
 - Depth of Wedge Anchor = Thickness of material fastened + Minimum embedment
 - Leave space for nut and washer
- Insert wedge anchor into concrete
 - Turn nut clockwise while pulling the anchor up
 - Wedge clip between anchor & concrete.

Notes:

- Do not install anchor within 10 anchor diameters of other anchor, or within 5 anchor diameters of unsupported edge.
- Install on even concrete surface



Proud

Classic Displays

Right for you since 1977

info@classicdisplays.com · 1-800-461-6635 · www.classicdisplays.com · 5959 Ambler Drive · Mississauga ON · L4W 2K2

ACCESSABILITY TABLE

Warranty

Classic Displays Site Furniture Warranty Statement

Classic Displays warrants to the original owner of a Classic Displays product for five (5) years from the date of substantial completion, that the product they receive will be free from defective workmanship and materials when subjected to proper and normal uses.

Limitations of Liability

Classic Displays warrants that should defects occur with a Classic Displays product, the company herein recognizes that it will produce a replacement product and ship it to the original owner at no charge.

Classic Displays shall not be liable for any consequential damages that the product may receive through incorrect usage, incorrect assembly or storage, vandalism, accidents, UV fading, visible rust, damage caused by animals, adverse environment conditions, or used in conjunction with materials harmful to the product (i.e road salt). This warranty does not cover wear and tear, and maintenance work is not considered a warranty issue.

In the event that defective materials are received, please advise our office immediately to expedite replacement materials.

Acceptance of Merchandise: Claims of products that are lost or damaged in transit are the responsibility of the customer in reporting the claim. When accepting shipment, missing cartons or visible damage must be noted on the carrier's bill of lading/receipt of delivery, and reported to our office immediately. Claims must be filed with the delivering carrier as soon as possible or may result in refusal of claim by the carrier.

Maintenance

Recycled Plastic Lumber:

- Using a plastic bristled brush, clean with mild soap, or water & vinegar solution.
- To remove grease, use a household grease remover.
- To remove scratches, lightly sand or brush, or use stainless steel brush.
- Restore surface by scrubbing with water & SOS pad.
- Rinse with water
- Power wash or pressure jet clean to remove graffiti & UV degradation (max 1200psi & maintain distance of 5 inches or greater)
- Use electric heat-gun or acetylene torch with metal putty knife to repair minor scratches.
- Graffiti remover with "Wipeout" by "Off the Walls"

Aluminum & Steel:

- Wash with mild soap & soft cloth. Touch up with paint pen

*Product design and specifications are the intellectual property of Classic Displays and may not be recreated without Classic Displays written consent.



Classic Displays

Right for you since 1977