

CONTOUR 6'



A straightforward and stream-lined appearance, the Contour bench offers an accessible 18" seat height and optional arms. With its two legged design and surface mount or in-ground options, the versatile Contour bench makes both installation and landscaping a breeze.

Standard Colour Options



Proud

Classic Displays

Right for you since 1977

CONTOUR 6'





*5' Length Also Available

MATERIALS

- 100% Recycled Plastic Lumber
- Electrostatically Zinc Plated Steel Components
- Stainless Steel Hardware

FINISHES

- Glossy Black Powdercoat Finish Resistant To Impact, Moisture, Chipping, Corrosion And Fading
- Slats Available In Grey, Walnut, Sand, Green, Redwood, Olive And Charcoal
- Available In A Surface Mount With Pre-drilled Feet Or In-ground Mount
- Premium Slat Colours Available

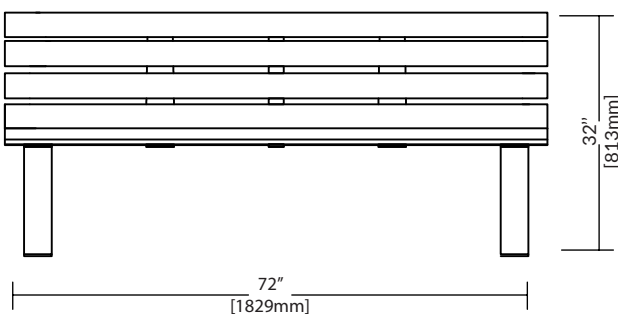

TO SPECIFY

- Slat Colour
- Frame / Ends Colour
- Arm Configuration
- Surface Mount or In-Ground

Length	72"	1829mm
Depth	23"	584mm
Height	32"	813mm
Seat Height	18"	457mm
Weight	152 lbs	69 kg



Classic Displays
Proud Right for you since 1977

CONTOUR 6'

Bench Options

Custom Bronze or Aluminum Plaque



Custom Standard Plaque




Logo Insert



Premium Colours



Premium Colour Options

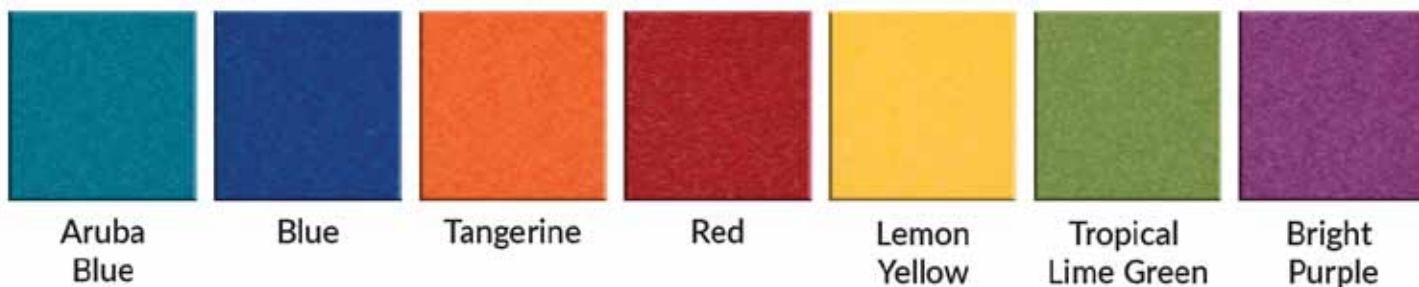

• Min. Quantities May Apply

• Bright White Also Available
• Additional Customization Available



Classic Displays

Proud Right for you since 1977

CONTOUR 6'

Installation- Surface Mount

- For Benches with pre-drilled Legs

Tools and Hardware Required:

- Hammer Drill
- Masonry Bit
- Expanding concrete/wedge anchor (stainless steel recommended) with locking nut

Instructions:

- Drill ½" deeper than anchor will penetrate
 - Deeper anchor will offer better hold
- Drill hole in concrete equal to diameter of anchor
 - Depth of Wedge Anchor = Thickness of material fastened + Minimum embedment
 - Leave space for nut and washer
- Insert wedge anchor into concrete
 - Turn nut clockwise while pulling the anchor up
 - Wedge clip between anchor & concrete.

Notes:

- Do not install anchor within 10 anchor diameters of other anchor, or within 5 anchor diameters of unsupported edge.
- Install on even concrete surface



Proud

Classic Displays

Right for you since 1977