










Snow Fancy




The Snow Fancy creatively intertwines the elliptical motif of the Snow Twist with a 6 sided flower creating a unique design rarely seen. Using two contrasting LED rope light colours, the Snow Fancy can really “pop” making it a dynamic yet neutral display that looks great in a wide variety of settings. The Snow Fancy is considered a winter themed display, and therefore can remain up on the poles or building facades throughout the entire winter season into early March. Featuring our premium 0.5” LED rope light tracing a zinc-plated steel frame, the Snow Fancy is designed with longevity in mind for usage over multiple winter seasons. Wall-mounting frames can also be specified.

LED Rope Light Colours

Pure White		Red	
Warm White		Orange	
Blue		Purple	
Green		Pink	
Yellow			

*Contact sales rep for more information on rope light colours

Snow Fancy

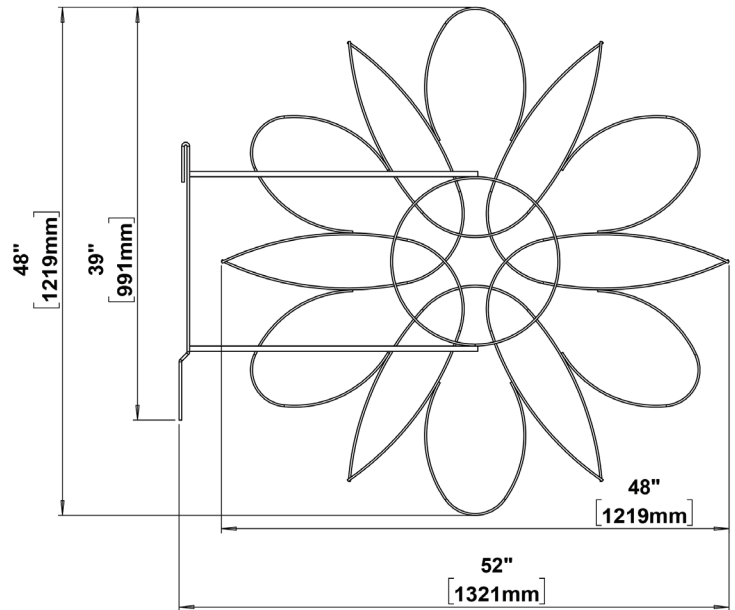

Height	48"	1219mm
Width	48"	1219mm
Span	52"	1321mm
Weight	25.4 lbs	11.5 kg
Power	51 w	120 v

Materials

- Zinc Plated Steel Frame and Mounting Bracket For Maximum Rust Protection
- 1/2" Commercial Grade 120V LED Rope Light with 1" Diode Spacing
- All display items are equipped with 120 VAC plugs with 5' cord length
- All Units are CSA Approved

Finishes

- Powdercoated Steel Frame (White) and Mounting Bracket (Black)
- Rope Light Colour Options Include Warm White, Pure White, Blue, Green, Yellow, Red, Orange, Pink, and Purple
- Optional Colour Match Mounting Bracket
- Optional Wall Mount Application
- Optional Aluminum Frame


To Specify

- Side Mount or Wall Mount
- Rope Light Colour
- Optional Colour Match Mounting Bracket
- Optional Aluminum Frame



Classic Displays
Right for you since 1977

Mounting Bracket (Pole Plate)



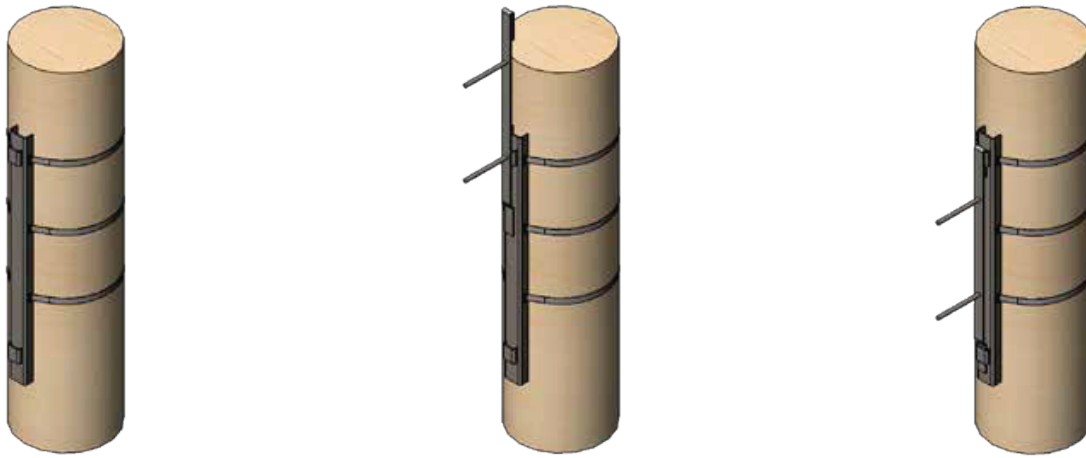


Materials

- 2" x 1" x 1/8" thick A36 structural zinc-plated, powder coated steel main channel
- 1 1/2" x 1/2" x 1/8" A36 thick structural zinc-plated, powder coated steel decoration bracket channel
- 5/8" width x 0.30" thick Stainless Steel Banding (sold separately). Two bands recommended per standard sized displays, three bands recommended for displays greater than 48" x 48"

Features

- Zinc-plated and powder coated for maximum durability and rust protection
- Standard paint colour is black, optional custom "colour match" to pole colour upon request (additional costing and lead times for custom paint colours)
- Suitable for permanent or temporary side mounted pole displays
- Mounting bracket designed to remain on pole year-round for ease of installation and removal of side mounted display units

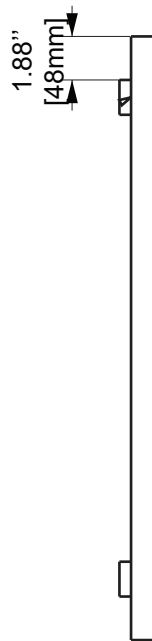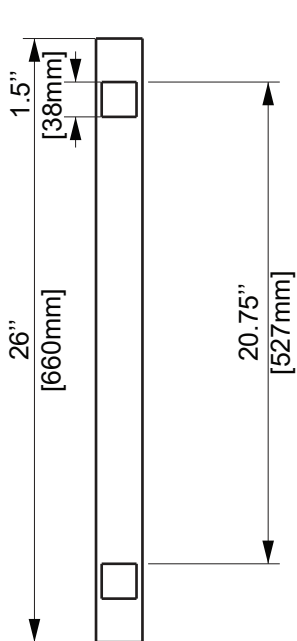

Proud

Classic Displays

Right for you since 1977

Side-Mount LED Display Usage Guide

General Requirements

1. Power requirements for LED displays are standard 120VAC (60 HZ, 1.25A).
2. Ground fault interrupter (GFI) protection should be provided on circuit or outlet.
3. Use only outdoor extension cords, such as type SOW, STW, SJOW or SJTW.

Installation

1. Test all units prior to installation on poles. (New units are tested at our facility prior to shipping).
2. Secure mounting bracket (pole plate) (included) to pole using 5/8" stainless steel strapping with .03" thickness. Use 2-3 bands per mounting bracket (pole plate), depending on weight of display.
3. Insert display into mounting bracket (pole plate). Refer to installation instructions for more details.
4. Recommended clearance above roadway is 18' from bottom of display.
5. Recommended clearance above sidewalk is 9.5' from bottom of display.

Storage

1. Power-wash displays to remove any road salt/grime prior to storage during off-season (strongly recommended).
2. Store displays indoors and away from direct sunlight in a dry environment.
3. Store displays hanging by mounting portion of frame or upright on the mounting portion of the frame
4. Do not stack items on top of displays, or store displays on top of each other.

Maintenance/Care

1. Grasp plug and remove from receptacle or other outlet device. Do not unplug by pulling on the cord.
2. If no power to display unit, verify power supply, then check fuse in male plug under access cover.
3. Disconnect power before replacing fuse. Use only 5 Amps, 125 Volt fuse.
4. Carefully remove old fuse and replace fuse. Reinstall fuse cover.
5. Rope light fails in 3' sections (red and orange rope light fails in 5' sections). Should section failure occur, please refer to Classic Displays rope light repair instructions.



Proud

Classic Displays

Right for you since 1977

Warranty

Classic Displays Product Warranty

Classic Displays warrants to the original owner of a Classic Displays product for five (5) years from the date of substantial completion, that the product they receive will be free from defective workmanship and materials when subjected to proper and normal uses.

Lighting Warranty

Classic Displays warrants to the original owner of a Classic Displays product for one (1) year on all LED lighting from the date of substantial completion, that the product they receive will be free from defective workmanship and materials when subjected to proper and normal uses.

Limitations of Liability

Classic Displays shall not be liable for any consequential damages that products may receive through incorrect usage, rough handling, adverse environmental conditions, damage caused by the public or animals, or used in conjunction with materials harmful to products (i.e salt). Maintenance work is not considered a warranty issue.

Insurance, Licenses, and Accreditation

- Classic Displays is registered with WSIB and remains in good standing
- Classic Displays is a member of ContractorCheck and ComplyWorks
- \$5,000,000.00 in Commercial General Liability Insurance is carried by Classic Displays

Classic Displays warrants that should defects occur with a Classic Displays product, the company herein recognizes that it will produce a replacement product and ship it to the original owner at no charge. In the event that defective materials are received, please advise us our office immediately to expedite replacement materials.

* Acceptance of Merchandise: Claims of products that are lost or damaged in transit are the responsibility of the customer in reporting the claim. When accepting shipment, missing cartons or visible damage must be noted on delivery driver's bill of lading/receipt of delivery, and reported to our office. Claims must be filed with the delivering carrier as soon as possible or may result in refusal of claim by the carrier.

*Product design and specifications are the intellectual property of Classic Displays and may not be recreated without Classic Displays written consent.



Classic Displays
Right for you since 1977