

Modular Bike Corral



Our Modular Bike Corral consists of 2 capacity and/or 4 capacity mid-rack sections, allowing for unlimited configurability based on the length of the bike parking area. The Modular Bike Corral System can also be specified without individual bike stalls when serving only as a protective barrier to a bike parking area, or an expanded “Rest, Refresh, & Repair” area where bike parking is combined with other amenities such as a Bike Repair Station, Bike Tire Pump, Water Refill Station, and/or bench for seating.

The end rack sections feature a large 12” bicycle symbol providing cyclists with ample notice of a bike parking area when approaching the Bike Corral. The dual back-screened lexan panels can be customized with any logo or message in virtually any design or colour.

Fabricated from a robust impact resistant 2” square tube steel construction, the Modular Bike Corral System offers enhanced security for cyclists when securing their bike, while deterring would-be thieves in even the darkest alleys. All Bike Corral sections come standard in a Natural Galvanized Steel finish, or can be specified in a zinc-plated powder coated finish for an enhanced look. All end rack and joining post sections include pre-drilled 6” x 6” base plates with a robust .375” thickness for bolt down to concrete or anchor in asphalt.

The Modular Bike Corral System can be specified for as little as 4 bike parking spaces, adding 2 or 4 bike parking spaces with every additional mid-rack section. All bike corral systems require 2 end rack sections, with each mid-rack section connected to one another by a joining post. The maximum number of bike parking spaces in the Modular Bike Corral is virtually unlimited.

The Standard 22’ (7m) size is made up of 2 end racks, 3 mid-racks with 4 bike capacity, one mid-rack with 2 bike capacity, and 3 joining posts. The Standard 22’ size fits one vehicular parking space, providing a capacity for 14 bicycles.




Classic Displays

Right for you since 1977

Product Data Sheet



- Modular system allows for unlimited flexibility
- Mid-Rack sections available with or without stalls
- End-Rack sections feature custom lexan paneling
- Robust 2" steel tube construction
- Heavy Duty 3/8" thick steel feet

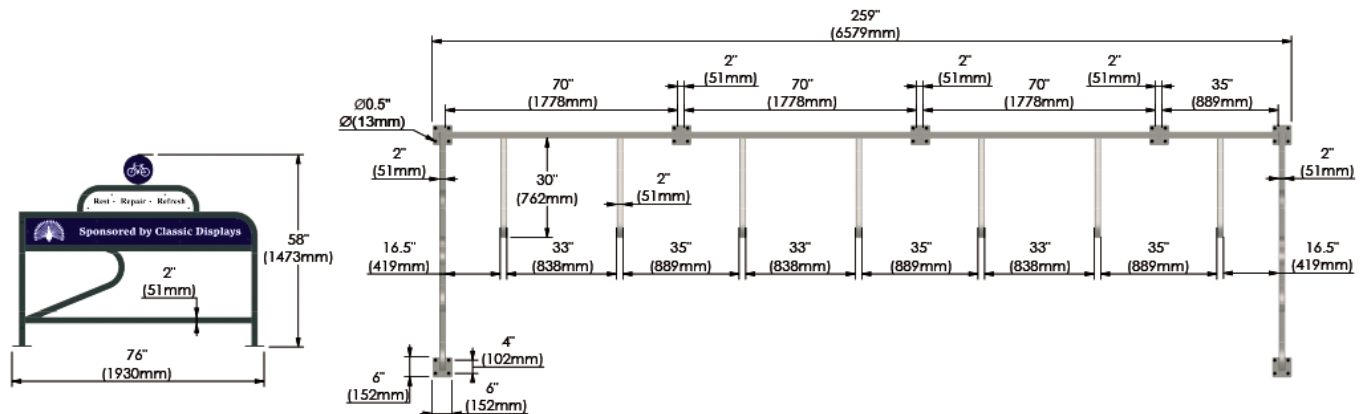

- Configuration (4-28 spaces, with or without stalls)
- Galvanized or Powder Coat Finish
- Optional Paint Colours
- Optional Custom Lexan Panels

info@classicdisplays.com • 1-800-461-6635 • www.classicdisplays.com • 5959 Ambler Drive • Mississauga ON • L4W 2K2

Modular Bike Corral

Installation

Tools and Hardware Required:

- Hammer Drill/Core Drill
- Masonry Bit
- Expanding concrete/wedge anchor (stainless steel recommended) with locking nut (For Surface Mount Installation)
- Grout and Level (For In-Ground Installation)

Surface Mount Installation:

- Drill 1/2" deeper than anchor will penetrate
- Deeper anchor will offer better hold
- Drill hole in concrete equal to diameter of anchor
- Depth of Wedge Anchor = Thickness of material fastened + Minimum embedment
- Leave space for nut and washer
- Insert wedge anchor into concrete
- Turn nut clockwise while pulling the anchor up
- Wedge clip between anchor & concrete

Notes:

- Do not install anchor within 10 anchor diameters of other anchor, or within 5 anchor diameters of unsupported edge
- Base is pre-drilled for easy surface mounting (recommended)
- Install on even concrete surface



Classic Displays

Right for you since 1977

info@classicdisplays.com • 1-800-461-6635 • www.classicdisplays.com • 5959 Ambler Drive • Mississauga ON • L4W 2K2

Modular Bike Corral

Warranty

Classic Displays Site Furniture Warranty Statement

Classic Displays warrants to the original owner of a Classic Displays product for five years from the date of substantial completion, that the product they receive will be free from defective workmanship and materials when subjected to proper and normal uses.

Limitations of Liability

Classic Displays warrants that should defects occur with a Classic Displays product, the company herein recognizes that it will produce a replacement product and ship it to the original owner at no charge. Classic Displays shall not be liable for any consequential damages that the product may receive through incorrect usage, adverse environment conditions, or used in conjunction with materials harmful to the product.

In the event that defective materials are received, please advise us our office immediately to expedite replacement materials.

* **Acceptance of Merchandise:** Claims of products that are lost or damaged in transit are the responsibility of the customer in reporting the claim. When accepting shipment, missing cartons or visible damage must be noted on the carrier's bill of lading/receipt of delivery, and reported to our office. Claims must be filed with the delivering carrier as soon as possible or may result in refusal of claim by the carrier.

Maintenance

Wash with Soap and Water

- Mix 1/4 cup dish soap in a gallon of hot (not scalding) water.
- Scrub the metal surface with firm, circular strokes using a soft-bristled brush.
- Rinse this off thoroughly with hot water and then wipe it dry using a lint-free cloth.

Clean Off Hard Water

- Create a solution of equal parts white distilled vinegar and water.
- Rub the solution into the metal with a soft cloth or spray with a spray bottle.
- Dry with a cloth.

Neutralize Alkaline Deposits (Galvanized Steel)

- Mix one part baby powder with two parts milk.
- Use a toothbrush to apply this solution to the metal surface.
- Rinse off and dry thoroughly.



Classic Displays

Right for you since 1977